



PS Laptop Management Cart with pre-installed Cat 6 Ethernet cables

Highlights

Universal Design

- Open-architecture design works with laptops, netbooks and tablets with displays up to 15.6". Maximum device size 15.1"W x 11"D x 1.69"H (38,4 x 28 x 4,3 cm)
- Country-specific power strip is provided to plug in 20 AC adapters. Unique, flexible design accommodates a variety of brick and plug styles for laptops, netbooks and tablets that won't fit in standard outlet strips

PowerShuttle® Technology

- Efficiently scans the system and distributes power to optimize total charge time for the laptops and prevent overloading electrical circuits at the same time

Durable, Secure Storage

- Robust key and lock assembly keeps devices secure. Double-hinged, locking steel front doors with recessed handle open 180° to reveal notebook storage shelves
- Rugged steel frame construction, steel front and rear doors, and molded fire-rated ABS exterior withstands heavy use of classroom settings
- For user and equipment safety, the entire cart is tested and certified to UL 60950 and 1667 standards
- Secure back compartment provides IT access to power brick storage and power strips. Clean, neat cable management runs power to units

Easy to Use

- Lightweight, up to 49% smaller than competitive product, this compact cart design makes it easy to safely move from room to room
- Ships fully assembled
- Four 4" (10 cm) medical-grade, dual-wheel locking casters allow easy push/pull mobility

ERGOTRON®

PowerShuttle® (PS) Laptop Management Cart PowerShuttle (PS) Laptop Charging Cart



Charges. Manages. Compact, secure and cost-effective design.

Buying the right laptops is only one piece of the puzzle. Securely storing, deploying and managing those important assets while making it easy for staff is equally important. This cart's universal interface charges and manages software on up to 20 devices (works with laptops, netbooks and tablets). Patented PowerShuttle Load Sensing Technology optimizes total charge time while safely preventing electrical circuit overload by efficiently grouping the number of devices that are charged at one time. Works in any environment, including education, healthcare and enterprise applications.

**JUST
STAND
.ORG**



PS Laptop Management Cart (switch not included)



CERTIFICATION

UL 60950 Safety of Information Technology Equipment, CAN/CSA C22 2 No. 60950

UL 1667 Tall Institutional Carts for use with Audio, Video and Television Type Equipment

ICES-003 Issue 4, Class A

FCC Part 15 Class A

Country-specific certification as required

RoHS and Reach compliant material used

- Maximum device size: 15.1" W x 11.0" D x 1.69" H (38,4 x 28 x 4,3 cm)
- Maximum device weight: ≤ 6.5 lbs (2,9 kg)

PowerShuttle Technology

- Efficient charging system uses Ergotron's innovative patent-pending PowerShuttle Technology to automatically optimize total charge time for up to 20 laptops or mobile devices
- Cart is powered using one country-specific power cord (12.5', 3,8 m) plugged into a wall outlet. Cord wrap is recessed into side of cart
- Never waste time charging an empty set of slots
- Safely prevents overloading electrical circuits by efficiently grouping the number of devices that are charged at one time
- LED status indicators provide users with zone charging status
- How it works: When the cart is plugged in, the system automatically measures and stores the current draw of the external outlet and the power strips inside the cart (5 devices per power strip). Max wall current is 12A for 100-120V countries and 8A for 220-240V countries. The PowerShuttle subtracts the current for the always-on devices (auxiliary outlets) from the max wall current. This leaves the amount of current available for the power strips. PowerShuttle then groups the power strips in the minimum number of groups for charging without exceeding the max wall current
- LED status indicators provide users with power distribution status
- Power (North America/Japan): 100-120V ~ 50/60Hz, 12A
- Power (UK, Europe, Australia, and China): 220-240V ~ 50/60Hz, 8A

Compact Size

- Lightweight; up to 49% smaller than competitive product, this compact cart design makes it easy to safely move from room to room

Durable, Secure Storage

- Robust two-point key and lock assembly keeps devices secure. Double-hinged, locking steel front doors open 180° to reveal storage shelves
- Rugged steel frame construction, steel front and rear doors, and molded fire-rated ABS exterior withstands heavy use of classroom settings
- Separate top and back storage compartments provide IT access to power brick storage
- Four 4" (10 cm) locking medical grade, dual wheel casters

Additional Features PS Laptop Cart Only

- Twenty (20) pre-installed CAT 6 RJ4S Ethernet cables enable remote management of laptops for software updates via Wake On LAN (with customer supplied Ethernet switch)
- Mounting brackets and country-specific internal auxiliary outlet for switch and WAP power

- Laptop Management Cart includes external auxiliary outlet (2 receptacles for North America/ Japan, 1 for all other countries). Power is continuous to these outlets when in use
- Five (5) 12V DC continuous operating fans are included to keep equipment cool during the management process. Not needed for charge-only
- Built-in temperature sensor protects your equipment by shutting down charging activity if the maximum internal cart temperature is exceeded. Charging activity will resume automatically once temperature returns to safe levels

| | | |
|-----------------------------|---|--|
| Product Name (color) | PS Laptop Management Cart (black) | PS Laptop Charging Cart (black) |
| | 24-246-085 US/CA/MX | 24-291-085 US/CA/MX |
| Part number | 24-247-085 China | 24-292-085 China |
| | 24-248-085 Japan | 24-293-085 Japan |
| | 24-249-085 UK/SNG/HK | 24-294-085 UK/SNG/HK |
| | 24-250-085 EU | 24-295-085 EU |
| | 24-251-085 AU/NZ | 24-296-085 AU/NZ |
| Product Includes | 20 device slots, 12.5' (3,8 m) power cable, country-specific power strip, cable management tray, four 4" medical-grade locking casters, integrated handle | |
| Additional Features | 20 CAT 6 Ethernet cables, standard 1U Ethernet switch mounting brackets, auxiliary outlet (external), auxiliary outlet (internal for switch and WAP) | One (1) 12V DC continuous operating fan in top compartment |
| | Five (5) 12V DC continuous operating fans Built-in temperature sensor | |
| Product Dimensions | 28.0" W x 24.4" D x 40.0" H (71,1 x 62.0 x 101,6 cm) | |
| Shipping Dimensions | 32.7" W x 27.6" D x 46.4" H (83 x 70,2 x 117,9 cm) | |
| Product Weight | 157 lbs (71 kg) | 146 lbs (66,2 kg) |
| Shipping Weight | 214 lbs (97,1 kg) | 203 lbs (92,1 kg) |
| Warranty | Five (5) years; two (2) years for power module; one (1) year for other electrical components | |

© 2015 Ergotron, Inc. rev. 01/20/2015/EA Literature made in US
Content is subject to change without notification

Americas Sales and Corporate Headquarters

St. Paul, MN USA
(800) 888-8458
+1-651-681-7600
www.ergotron.com
sales@ergotron.com

EMEA Sales

Amersfoort, The Netherlands
+31 33 45 45 600
www.ergotron.com
info.eu@ergotron.com

APAC Sales

Tokyo, Japan
www.ergotron.com
apaccustomerservice@ergotron.com

Worldwide OEM Sales


www.ergotron.com
info.oem@ergotron.com





COAST Wholesale
APPLIANCES

BOSCH

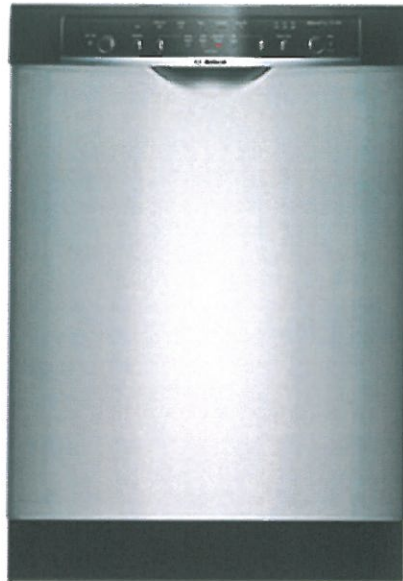

Bosch Full Console Dishwasher
Model# SHE3AR55UC

Feature:

14-Place Settings
4 Wash Cycles
2 Options
Sanitize Option
Delay Start
Standard Racks
50 dBA
Stainless Steel

Dimensions


Width : 23 9/16"
Depth : 22 9/16"
Height : 33 7/8"

Dimensions to be used for preliminary planning only not for construction purposes. Please visit our website for detailed and up to date features and dimensions at www.coastappliances.com





COAST Wholesale
APPLIANCES

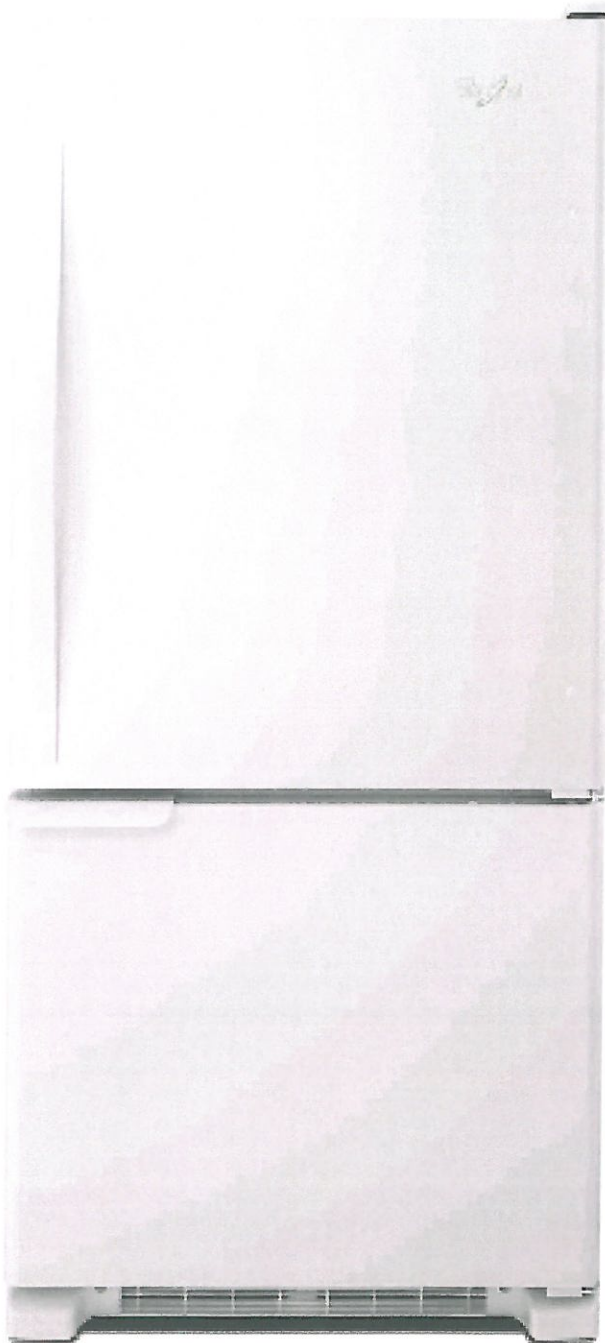

Features:

Accu-Chill™ Temperature Management System
SpillGuard™ Glass Shelves
Adaptive Defrost
LED Interior Lighting
FreshFlow™ Produce Preserver
18.7 Cu Ft Capacity

Dimensions:

Height: 67"
Width: 29 3/4"
Depth: 33 3/8"

Whirlpool Bottom-Mount Refrigerator

Model# WRB119WFBW

Dimensions to be used for preliminary planning only not for construction purposes. Please visit our website for detailed and up to date features and dimensions at www.coastappliances.com





**COAST Wholesale
APPLIANCES**

"Innovative Products for Builders, Designers & Home Owners"

Panasonic®

**Microwave
NNST681S**



DIMENSIONS:

310 x 525 x 401 mm / 12.20" x 20.67" x 15.79"

Dimensions to be used for preliminary planning only not for construction purposes. Please visit our website for detailed and up to date features and dimensions at www.coastappliances.com

Convenient 5 Button Control Panel
1.2 cu ft.

1200 W output power

Sensor reheat

Sensor cook with instant access buttons
(5 categories)

Inverter® Turbo Defrost

Popcorn key

Keep Warm

Quick Minute

Child Safety Lock

Optional trim kit available

Exterior dimensions

Color: Stainless Steel with Black Accents



Large Janitorial/Landscape Equipment

SPS currently uses:

1. 2 Hurricane 510 XTT auto scrubbers
2. 2 18 gal tilt and pour wet dry vacs
3. 2 Integra floor polishers
4. Misc. hand tools like mops and buckets.
5. 1 28" power brush (require heated storage)
6. 1 snow blower 27 inch dual staged (require heated storage)

GSCS currently uses:

1. Walk behind floor scrubber - Advance Adfinity 20d c/w 2 - 130 AH batteries, pad holder and on-board charger
2. Floor polisher (dual speed) - FR20115-2S 0 front runner 2 speed minuteman polisher/scrubber
3. Wet dry vacuum - C60-18 wet/dry vacuum cleaner
4. Upright vacuum - Karcher CV 30/1 upright vacuum cleaner
5. Snowblower – John Deere 1028e snowblower
6. Leaf blower - STIHL BR600 backpack leaf blower
7. Various other items – Rubbermaid mop buckets / snow shovels / ice scrapers / etc.

RCS currently uses:

1. Walk behind floor scrubber-ISO 20 inch Traction Drive comes with wet batteries, pad holder, and on board charger.
2. Floor Polisher (Dual Speed)-FR20115-2S 0 Front Runner 2 speed Minuteman Polisher/Scrubber
3. Wet Dry Vacuum-VL500-55 Dimensions 24width x 34length x 40 height
4. Upright Vacuum-Nilfisk VP300 120v for library and carpets
5. Extractor E5 Tennant Model 9004194
6. Snowblower-ST30LE Ariens Deluxe 30 inch
7. Lawnmower-Lawnboy 20 inch model 10640C
8. Lawn Tractor at Gabriel is John Deere 1026R. At all high school the model is John Deere 3520
9. Leaf Blower-STIHL BR600 Backpack Leaf Blower Vac
10. Various Other Items-Rubbermaid Mop buckets/Snow Shovels/Ice Scrapers/Etc.

PSSD currently uses:

1. 16 swivel frame & handle brooms (various sizes)
2. 28 dust mops (18", 24", 36" & 48")
3. 10 flat looped mops
4. 12 Mop sticks (54" & 60")
5. 12 medium blue flat mops
6. 4 adjustable mop handles
7. 1 wood thread broom handle (54")
8. 1 deck scrub brush handle
9. 1 wood thread broom handle (60")
10. 1 floor squeegee (24")
11. 2 window squeegees (12" & 18")
12. 15 – 20" burnishing pads
13. 15 – 13" buffer pads
14. 2 corn brooms

15. 4 warehouse brooms with handles
16. 12 sweep-eze brooms with handles
17. 6 sweep-eze broom heads only
18. 6 mop caddies
19. 6 sanitation mops
20. 27 boxes of powder free nitrile gloves (various sizes)
21. 16 "Wet Floor" signs
22. 4 janitor carts with bags
23. 6 bucket & wringer combo
24. 6 plastic dust pans
25. 20 scrub sponges
26. 1 – 20" burnisher
27. 1 walk behind auto-scrubber
28. 1 ride on auto-scrubber
29. 2 vacuums
30. 1 Advance Battery auto high speed burnisher
31. 1 electric 2000-1500rpm. High speed burnisher
32. Ride on snow blower with power brush (&/or mower attachment)


PSSD Supplies:

1. 5 boxes Towels & cloths (+/- 15lb per box)
2. Scrubbing pads & erasing pads
3. 95 jugs of various cleaners, polishers, disinfectants & detergents
4. 48 containers to mix/use above items (spray & pour spout type bottles)
5. 46 boxes of various size garbage bags & recycling bags
6. Various sized batteries, extra batteries & battery chargers for large equipment items
7. Holders for burnishing & scrubbing pads
8. Dusting supplies

T5


The Cleaning Professional's Scrubber

- Achieve 100% solution recovery – even on 180 degree turns – with superior squeegee design
- Quietly clean with a true, OSHA-recognized test-standard 67 dBA
- Increase safety with FaST™ foam scrubbing, NFSI-certified to increase floor traction 21%

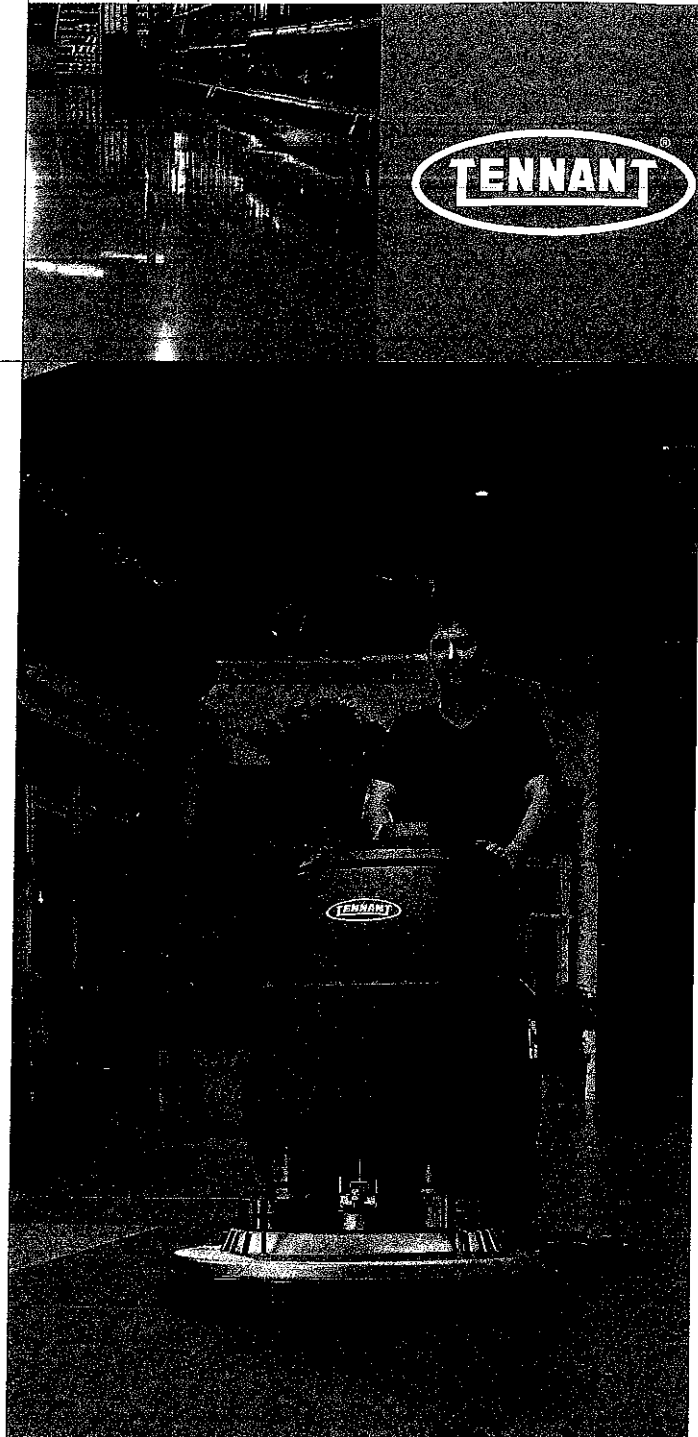

FaST
Foam Scrubbing Technology

The Safe Scrubbing Alternative®

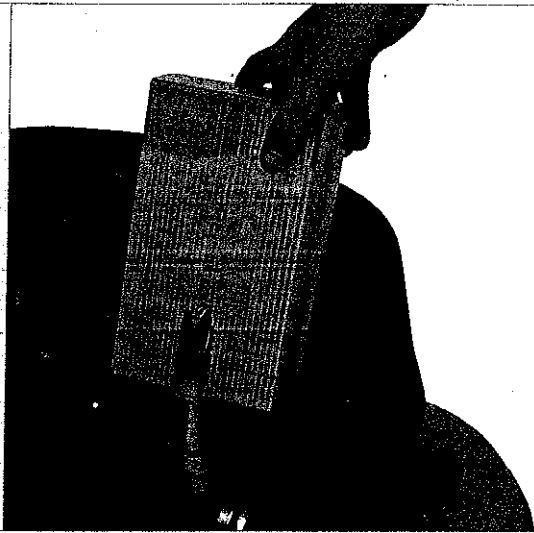

GENUINE TENNANT PARTS, SUPPLIES & SERVICE

Foam-based FaST: the Key to Peak Productivity and Safety

Using an innovative foam-based detergent delivery system, scrubbers with FaST increase productivity, eliminate the need for operators to handle chemicals, and leave just-cleaned floors virtually dry and safe for traffic.

Genuine Tennant Parts Advantage

Operate your machine with confidence by choosing genuine Tennant parts. Only authentic Tennant parts are engineered in conjunction with Tennant equipment. For years of worry-free operation, accept only genuine parts and supplies.

Industry's Only Factory-Direct Service Network

Tennant offers the only factory-trained, locally based network of 400+ service techs dedicated to keeping your cleaning program up and running.

Choose Tennant Financial for simple, quick financing with flexible upgrade options, and no long-term obligations.



Certified by the NFSI, FaST increases floor traction up to 21%.

T5 WALK-BEHIND FLOOR SCRUBBER

| FEATURES | Disk | Cylindrical |
|--|---|--|
| Scrubbing System | | |
| Cleaning path | 24 in / 600 mm 28 in / 700 mm 32 in / 800 mm | 26 in / 650 mm 32 in / 800mm |
| Solution tank capacity | 22.5 gal / 85 L | 22.5 gal / 85 L |
| Productivity (per hour) | | |
| Theoretical max | (24 in) 26,400 ft ² / 2,500 m ² (28 in) 30,800 ft ² / 2,900 m ² (32 in) 35,200 ft ² / 3,300 m ² | (26 in) 28,600 ft ² / 2,700 m ² (32 in) 35,200 ft ² / 3,300 m ² |
| Estimated actual* (conventional) | (24 in) 17,875 ft ² / 1,660 m ² (28 in) 20,800 ft ² / 1,900 m ² (32 in) 24,000 ft ² / 2,200 m ² | (26 in) 19,200 ft ² / 1,790 m ² (32 in) 24,000 ft ² / 2,200 m ² |
| Estimated actual* (FaST) | (24 in) 20,075 ft ² / 1,900 m ² (28 in) 22,750 ft ² / 2,100 m ² (32 in) 26,250 ft ² / 2,400 m ² | (26 in) 21,000 ft ² / 2,000 m ² (32 in) 26,250 ft ² / 2,400 m ² |
| Recovery System | | |
| Scrub motors | (2) 0.75 hp / 0.56 kW | (2) 0.63 hp / 0.47 kW |
| Scrub motor speed | 220 rpm | 1500 rpm |
| Brush/pad down pressure | (3 settings) 40, 80 and 120 lb / 18, 36 and 54 kg | |
| Recovery tank capacity (includes demisting chamber) | 27 gal / 102 L | |
| Vacuum motor | 0.85 hp / 0.64 kW, 3-stage | |
| Waterlift | 62 in / 1,570 mm | |
| Propelling & Power System | | |
| Propel speed (variable to) | | |
| Transport | 2.7 mph / 4.3 km/h | |
| Scrubbing | 2.5 mph / 4.0 km/h | |
| Batteries – 24 V system (4x 6 V batteries), charger included | | |
| Standard run time** | 6 V, 235 Ah / up to 5.5 hours | |
| Optional gel run time** | 6 V, 200 Ah / up to 4.5 hours | |
| Gradeability (ramp climb) | | |
| Scrubbing/transporting (full) | 3.0° / 5.0° | |
| Trailer ramps (empty) | 11° | |
| Dimensions/Weights | | |
| Product length | (24 in) 52.9 in / 1,340 mm (28 in) 55.7 in / 1,410 mm (32 in) 58.4 in / 1,480 mm | (26 in) 55.4 in / 1,410 mm (32 in) 55.4 in / 1,410 mm |
| Product width (scrub head) | (24 in) 25.4 in / 640 mm (28 in) 29 in / 740 mm (32 in) 33 in / 840 mm | (26 in) 28 in / 710 mm (32 in) 34 in / 860 mm |
| Squeegee width | (24 in) 35.7 in / 910 mm (28 in) 41.3 in / 1,050 mm (32 in) 46.6 in / 1,180 mm | (26 in) 41.3 in / 1,050 mm (32 in) 46.6 in / 1,180 mm |
| Product height | 44 in / 1,120 mm | |
| Product weight (with batteries) | (24 in) 580 lb / 263 kg (28 in) 609 lb / 276 kg (32 in) 621 lb / 282 kg | (26 in) 621 lb / 282 kg (32 in) 629 lb / 285 kg |
| Sound level*** (operator's ear) | 67 dBA | 68 dBA |
| Warranty 10/3/3 | 3 years / 2,500 hours on parts and labor (excluding batteries). 10 years on rotationally-molded polyethylene tanks. | |

* Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.

** Run times are based on continuous scrubbing run times.

*** Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment manufacturers & OSHA.

SEEING IS BELIEVING

See for yourself how the T5 scrubber can help you reach a higher standard of cleanliness and safety in your facility. For a demonstration or additional information, call 800.553.8033.

VACUUM.


**SUGGESTIONS FOR WRITING BID SPECIFICATIONS ON THE
ADVANCE VL500™ 55 or 75**

| GENERAL | Machine shall be the type described as a commercial duty, tank style vacuum for use in both wet and dry applications. The tank capacity shall be 14 gallons (55 L) or 19 gallons (75 L). | | | | | | | | | | | | |
|--------------------------------|--|--------------------|-----------------|-----------------|--------|-------------------|-------------------|---------|-------------------|-------------------|---------|--------------------|--------------------|
| MOTOR | The motor shall have a maximum power of 1,100 W and operate at 120 V / 60 Hz. The motor head shall be hinged for easy, no-tools, removal. | | | | | | | | | | | | |
| MAIN HANDLE AND TROLLEY | Shall be a fixed stainless steel push handle or an adjustable, folding, push handle with an integrated hanger for power cable storage. Machine tank and motor shall be easily lifted off the trolley with no tools for simple machine maintenance. | | | | | | | | | | | | |
| AIRFLOW + VACUUM | Shall be 101 CFM (48 L/sec) and 72 inches of H ₂ O (18 kPa). | | | | | | | | | | | | |
| SUCTION POWER | The machine shall have a suction power of 185 W or more at the end of the vacuum tube. | | | | | | | | | | | | |
| FILTRATION | The filtration system shall include a single filter set used in both wet and dry applications. The filter set shall include a high capacity cartridge filter that is waterproof, washable, and seals the motor head to ensure full motor protection from debris and liquids. The cartridge filter shall have a minimum filtration area of 683 in ² (4,410 cm ²). The wet filter shall be designed to dissipate foam and have a minimum filtration area of 285 in ² (1,840 cm ²). The filter system shall be a locking stack system to ensure proper alignment and optimum airflow through the vacuum system. | | | | | | | | | | | | |
| TANK EMPTY AND CAPACITY | The tank and frame shall include a weight distribution mechanism that allows users to easily dump a full tank without user strain. The machine shall include a drain hose and spout for simple tip-and-pour options to empty the tank. The tank capacity shall be 14 gallons (VL500-55) or 19 gallons (VL500-75). | | | | | | | | | | | | |
| SQUEEGEE | Shall include a break-away squeegee system with a simple foot-pedal engagement mechanism. | | | | | | | | | | | | |
| BASE | Shall be designed with a wide stance to ensure maneuverability even when the tank is full. | | | | | | | | | | | | |
| TOOLS/ ACCESSORIES | Shall have as standard onboard a hose, extension tube, crevice tool, floor nozzle with rubber strip, brush tool, and an optional squeegee kit. The machine shall have integrated tools storage for ease of use and simplified transportation. | | | | | | | | | | | | |
| POWER CABLE | Shall be 50 feet (15 m) in length. | | | | | | | | | | | | |
| WEIGHT | Shall be 52 pounds (23.5 kg) for the VL500-55 and 61 pounds (27.5 kg) for the VL500-75. | | | | | | | | | | | | |
| DIMENSIONS | Shall not exceed: <table><thead><tr><th></th><th><u>VL500-55</u></th><th><u>VL500-75</u></th></tr></thead><tbody><tr><td>Width:</td><td>24 inches (62 cm)</td><td>24 inches (62 cm)</td></tr><tr><td>Length:</td><td>34 inches (84 cm)</td><td>26 inches (66 cm)</td></tr><tr><td>Height:</td><td>40 inches (100 cm)</td><td>41 inches (103 cm)</td></tr></tbody></table> | | <u>VL500-55</u> | <u>VL500-75</u> | Width: | 24 inches (62 cm) | 24 inches (62 cm) | Length: | 34 inches (84 cm) | 26 inches (66 cm) | Height: | 40 inches (100 cm) | 41 inches (103 cm) |
| | <u>VL500-55</u> | <u>VL500-75</u> | | | | | | | | | | | |
| Width: | 24 inches (62 cm) | 24 inches (62 cm) | | | | | | | | | | | |
| Length: | 34 inches (84 cm) | 26 inches (66 cm) | | | | | | | | | | | |
| Height: | 40 inches (100 cm) | 41 inches (103 cm) | | | | | | | | | | | |


THE MACHINE SHALL BE AN ADVANCE VL500™ 55 or VL500™ 75.

Advance AquaClean® 16ST/16XP/18FLX

Carpet Extractors




The AquaClean® 18FLX has dual operating modes for traditional pull back or high productivity walk-behind extraction.



16XP and 18FLX have dual moisture modes for low moisture/ high productivity cleaning or deep restorative cleaning.



Carpet extraction and spotting/upholstery machine in one with integrated hand tool on the 16XP and 18FLX.

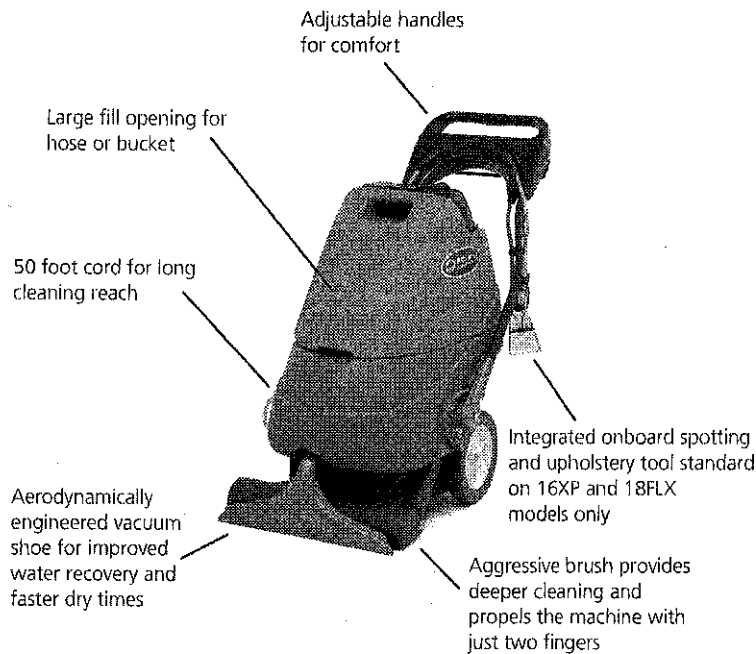

Defining Cleaning Innovation...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factory-trained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk-Advance Parts.

Technical Specifications

| Models | 16ST | 16XP | 18FLX |
|----------------------------|--------------------|-------------------------|-------------------------|
| Solution Tank | 8 gal (30.3 L) | 8 gal (30.3 L) | 11 gal (41.6 L) |
| Recovery Tank | 6 gal (22.7 L) | 6 gal (22.7 L) | 9 gal (34.1 L) |
| Flow Rate DCM Mode | N/A | 0.33 gpm @ 60 psi | 0.33 gpm @ 60 psi |
| Flow Rate Rest. Mode | 0.7 gpm @ 60 psi | 0.7 gpm @ 60 psi | 0.7 gpm @ 60 psi |
| Vacuum Motor | 1.5 hp, 3 stage | 1.5 hp, 3 stage | 1.5 hp, 3 stage |
| Brush Motor | 1/3 hp | 1/3 hp | 1/3 hp |
| Brush Size / Cleaning Path | 16 in (40.6 cm) | 16 in (40.6 cm) | 18 in (45.7 cm) |
| Vacuum Shoe | 18 in (45.7 cm) | 18 in (45.7 cm) | 20 in (45.7 cm) |
| Power Cable | 50 ft (15 m) Fixed | 50 ft (15 m) Detachable | 50 ft (15 m) Detachable |
| Waterlift | 117 in (297 cm) | 117 in (297 cm) | 117 in (297 cm) |
| Weight | | | |
| Net | 94 lb (42.64 kg) | 100 lb (45.36 kg) | 110 lb (49.90 kg) |
| Shipping | 120 lb (54.43 kg) | 126 lb (57.13 kg) | 180 lb (81.65 kg) |
| Part Numbers | 56265003 | 56265000 | 56265001 |

Specifications are subject to change without notice.



14600 21st Avenue North
Plymouth, MN 55447-3408
www.advance-us.com
Phone: 800-850-6559
Fax: 800-989-6566

240 Superior Boulevard
Mississauga, Ontario, Canada L5T 2L2
www.nilfisk-advance.ca
Phone: 905-564-1149 or 800-668-8400
Fax: 905-564-1030 or 800-263-5111

©2012, Nilfisk-Advance, Inc.,
Printed in U.S.A., Form L1677A, 10-12



Search by keyword, product code...



CALL 1-800-723-4000

View cart
(0 items): **Sub-total: \$0.00**



- [Binding](#)
- [Laminating](#)
- [Shredding](#)
- [Cutting](#)
- [Paper Handling](#)
- [Service](#)
- [Customize](#)
- [Reconditioned Equipment](#)

Home / Laminating / Equipment / Roll Laminators / Desktop / GBC® HeatSeal® Pinnacle 27 EZload® Thermal Roll Laminator, NAP I/II, 27" Max. Width, 6 Min Warm-Up [Sign In](#) [Product Registration](#)

GBC® HeatSeal® Pinnacle 27 EZload® Thermal Roll Laminator, NAP I/II, 27" Max. Width, 6 Min Warm-Up

Thermal roll laminator with EZload simplifies film loading and provides quick and easy laminating. Warms up in just 6-9 minutes to laminate items up to 27" wide with NAP I or II film up to 3 mil thick. Built-in horizontal trimmer helps you turn out clean and polished lamination every time and the control panel includes a handy footage counter.

1701720EZ

Call for a quote 1-800-723-4000

[Compare \(up to 4\)](#)

- [Features](#)
- [Specifications](#)
- [Resources](#)

- Thermal roll laminator with EZload technology eliminates film loading mistakes
- Use with Pinnacle 27 EZload Roll Film up to 3 mil thick
- 6 to 9 minute warm-up time
- Variable speed, laminates up to 12' per minute
- 27" maximum document width
- Additional features include audible alerts, footage counter, temperature readout, auto shutoff and motorized reverse
- Limited 1-year warranty
- 21" x 35.75" x 13.5"



Share this page 8+



GBC® Pinnacle 27 EZload® Roll Laminator
[Watch video](#)



GBC® Pinnacle 27 EZload™ How to Load Video
[Watch video](#)



GBC® Pinnacle 27 Roll EZload™ Laminator
[Watch video](#)

Related Products

Accessories & Supplies



GBC® HeatSeal® Pinnacle 27 Thermal Roll Laminator, NAP I/II, 27" Max. Width, 6 Min Warm-Up



GBC® Ultima® 35 EZload® Thermal Roll Laminator, 12" Max. Width, 1 Min Warm-Up

Trade West Equipment Ltd

Bulman R999 Eight Roll Vertical Paper Rack



Eight Roll Vertical Paper Racks. Designed for use wherever larger quantities of paper are required. The R999 holds eight 9" diameter rolls 36" in width and occupies only 25" x 48½" of floor space and stands 47 1/2" high. Mounted on four strong, smoothly rolling casters, the unit can be positioned and locked in place with integral caster wheel locks for safety and stability. Bulman Vertical Racks incorporate an automatic blade locking device for easy roll changing and spring-loaded blades for sure cutting. Welded steel construction and strong functional design assure durable, long wear life. Finished in attractive gray baked powder coat.

Features

- **Warranty: 1 Year**
- **Weight: 67 pounds**
- **Number of Rolls: 8**
- **Paper Roll Max.: 36"L**



Business Solutions

English

G

[Home](#) [Products & Services](#) [Support](#) [Sales/Service Locator](#) [About](#) [News](#) [Environment](#) [Careers](#)

You are here: [Canada](#) [Business Solutions](#) [Products](#) [Office Systems](#) [Monochrome MFP](#) [bizhub 364e](#)

Monochrome Multifunction Printer/Copiers

[Business Solutions](#)

[Products](#)

[Office Systems](#)

[Colour MFP](#)

[Monochrome MFP](#)

[bizhub 215](#)

[bizhub 224e](#)

[bizhub 25e](#)

[bizhub 284e](#)

[bizhub 364e](#)

[bizhub 4050](#)

[bizhub 454e](#)

[bizhub 4750](#)

[bizhub 554e](#)

[bizhub 654e](#)

[bizhub 754e](#)

[Printers](#)



bizhub 364e

The bizhub 364e puts you in total control, with a colour display as simple to operate as a tablet -- to print and copy both colour and B&W documents at up to 160 original resolution. You can control the solutions your business depends on. You can choose from various security options, auto finishing and more -- everything to enhance your productivity.

[Request a call](#)

[Overview](#)

[Accessories](#)

[Applications](#)

Overview

bizhub 364e

Key Features:

B&W: 36 ppm

Max Paper Capacity: 3,650 sheets

Optional Dual Scanning: 160 opm

Enhanced multi-touch interface

Other Features:

High-speed 36 ppm B&W print/copy output to keep ahead of rising demands

Optional dual scanning at up to 160 opm to capture originals in both colour and B&W

Built-in Emperon print system with PCL6/PS3 emulation, native XPS

Large 9" colour display -- as simple to operate as a familiar tablet

Multi-touch functions: swipe, drag, double-tap, toggle, pinch

Transparent menus, customizable icons, improved soft keyboards

Downloadable apps to make you more productive

Complies with IEEE 2600.1 international security standard

[Terms of Use](#) [Privacy Policy](#) [Sitemap](#)

[Global Site](#)

©2014 Konica Minolta Business Solutions (Canada) Ltd.



MFP

bizhub C364e

COLOUR MID-VOLUME MULTIFUNCTION PRINTER

bizhub C364e

Ideal for growing businesses, the bizhub C364e is a powerful, affordable colour MFP with superior Simitri HD image quality and fast 36 ppm print/copy output. Optional dual scanning at up to 160 opm brings information into your workflow faster – and enhanced touchscreen simplicity never slows you down.

System Overview

| | |
|--|--|
| System memory | 2,048 MB |
| System hard disk | 250 GB |
| Interface | 10BASE-T/100BASE-TX/1000BASE-T Ethernet, USB 2.0 |
| Network protocols | TCP/IP (IPv4/IPv6), SMB, LPD, IPP, SNMP, HTTP, HTTPS |
| Frame types | Ethernet 802.2, Ethernet 802.3, Ethernet II, Ethernet SNAP |
| Dual scan document feeder (optional) | Up to 100 originals / 5.5" x 8.5" to 11" x 17" / 35-163 gsm Reversing automatic document feeder or dual scan document feeder available |
| Printable paper size | Scanning/Copying: up to 11" x 17" Printing: up to 11" x 17" full bleed on 12" x 18" paper Custom paper sizes Banner paper 11.75" x 47.25" max |
| Printable paper weight | 52-300 gsm |
| Paper input capacity | Standard: 1,150 sheets / Max.: 3,650 sheets |
| Tray 1 | 500 sheets / 5.5" x 8.5" to 11" x 17" / 52-256 gsm |
| Tray 2 | 500 sheets / 5.5" x 8.5" to 12" x 18" / 52-256 gsm |
| Tray 3 (optional) | 500 sheets / 5.5" x 8.5" to 11" x 17" / 52-256 gsm |
| Tray 4 (optional) | 2 x 500 sheets / 5.5" x 8.5" to 8.5" x 11" / 52-256 gsm |
| Large capacity tray PC-410 (optional) | 2,500 sheets / 8.5" x 11" / 52-256 gsm |
| Manual bypass | 150 sheets / 4" x 6" to 12" x 18" / custom paper sizes / 50-300 gsm |
| Automatic duplexing | 5.5" x 8.5" to 12" x 18" / 52-256 gsm |
| Finishing modes | Offset, group, sort, punch, half-fold, tri-fold, booklet |
| Output capacity | Max. with finisher: 3,300 sheets Max. without finisher: 250 sheets |
| Stapling (optional) | Max.: 50 sheets or 48 sheets + 1 cover sheet (up to 209 gsm) |
| Stapling output capacity | Max.: 1,000 sheets |
| Tri-fold | Up to 3 sheets |
| Tri-fold capacity | Max.: 30 sheets (tray) |
| Booklet | Max.: 20 sheets or 19 sheets + 1 cover sheet (up to 209 gsm) |
| Booklet output capacity | Max.: 100 sheets (tray) |
| Copy/print volume | Max.: 125,000 pages/month ¹ |
| Toner lifetime | Black: 27,000 pages / CMY: 25,000 pages |
| Imaging unit lifetime | Black: 120,000 pages / 590,000 pages (Drum / Developer) CMY: 90,000 pages |
| Power consumption | 120 V / 50/60 Hz, less than 1.5 kW (system) |
| System dimensions | 24.2" x 27" x 31" (W x D x H) |
| System weight | Approx. 185.18 lb |

Copier Specifications

| | |
|--------------------------------------|--|
| Copying process | Electrostatic laser copy, tandem, indirect |
| Toner system | Simitri™ HD Polymerized Toner |
| Print speed (8.5" x 11") | B&W / Colour: up to 36 ppm (Portrait) |
| Print speed (11" x 17") | B&W / Colour: up to 18 ppm (Portrait) |
| Autoduplex speed (8.5" x 11") | B&W / Colour: up to 36 ppm (Portrait) |
| 1st copy out time | B&W: 5.3 sec / Colour: 6.9 sec |
| Warm-up time | Approx. 20 sec ² |
| Copy resolution | 600 x 600 dpi |
| Gradations | 256 gradations |
| Multi-copy | 1-9,999 |
| Original format | Up to 11" x 17" |
| Magnification | 25-400% in 0.1% steps, auto zooming |
| Copy functions | Electronic sorting, multi-job adjustments (contrast, sharpness, image density), proof copy, interrupt mode, colour mode, separate scan, sort/group, combination, original selection, ID card copy 2-in-1, 4-in-1 |

Printer Specifications

| | |
|--------------------------|---|
| Print resolution | 1800 x 600 dpi, 1200 x 1200 dpi |
| PDL | PCL 6 (xL 3.0), PCL 5c, PostScript 3 (ver. 3016), XPS |
| Operating systems | Windows (x32/x64) XP / Vista / 7 / 8 Windows Server (x32/x64) 2003 / 2008 / 2008 R2 ¹ / 2012 ² Macintosh OS X 10.2.8 or later UNIX / Linux / Citrix |
| Printer fonts | 80 PCL Latin, 137 PostScript 3 |
| Print functions | Direct Print of PCL, PS, TIFF, XPS, PDF, encrypted PDF files and OOXML (DOCX, XLSX, PPTX), multimedia and mixplex, "Easy Set" job programming, overlay, watermark, copy protection, carbon copy print |

Printer Specifications (optional)

| | |
|--------------------------|---|
| Print controller | Embedded Fiery IC-414 |
| Memory / HDD | 2 GB / 160 GB |
| PDL | PostScript 3 (ver. 3019) PCL 6/5c |
| Operating systems | Windows (x32/x64) XP / Vista / 7 / 8 Windows Server (x32/x64) 2003 / 2008 / 2008 R2 ¹ / 2012 ² Macintosh OS X 10.2.8 or later |

Scanner Specifications

| | |
|--------------------------|---|
| Scan speed | B&W / Colour: up to 160 opm with optional DF-701 |
| Scan resolution | Max.: 600 x 600 dpi |
| Scan modes | Scan-to-Email, Scan-to-SMB, Scan-to-FTP, Scan-to-Box, Scan-to-USB, Scan-to-WebDAV, Scan-to-DRWS, Network TWAIN scan |
| File formats | JPEG, TIFF, PDF, PDF/A 1a and 1b (optional), compact PDF, encrypted PDF and searchable PDF (optional), XPS, compact XPS, PPTX and searchable PPTX (optional), searchable DOCX/XLSX (optional) |
| Scan destinations | 2,100 (shared with fax), LDAP support |
| Scan functions | Annotation (text/time/date) for PDF, up to 400 job programs, realtime scan preview |

Fax Specifications

| | |
|---------------------|--|
| Fax | Super G3 (optional) |
| Transmission | Analog, i-Fax, Colour i-Fax, IP-fax |
| Resolution | Max.: 600 x 600 dpi (ultra-fine) |
| Compression | MH, MR, MMR, JBIG |
| Modem | Up to 33.6 Kbps |
| Destinations | 2,100 (single + group) |
| Functions | Polling, time shift, PC fax, receipt to confidential box, receipt to email/FTP/SMB, up to 400 job programs |

User Box Specifications


| | |
|-------------------------------|---|
| Storable documents | Max.: 3,000 documents or 10,000 pages |
| Type of user boxes | Public Personal (with password or authentication) Group (with authentication) |
| Type of system boxes | Secure Print, Encrypted PDF, Fax receipt, Fax polling, Annotation |
| User box functionality | Reprint, combination download, sending (email/FTP/SMB and fax), copy box to box |

Minuteman[®]
Excellence Meets Clean



Front Runner Floor Machines

13", 17" & 20" floor machines

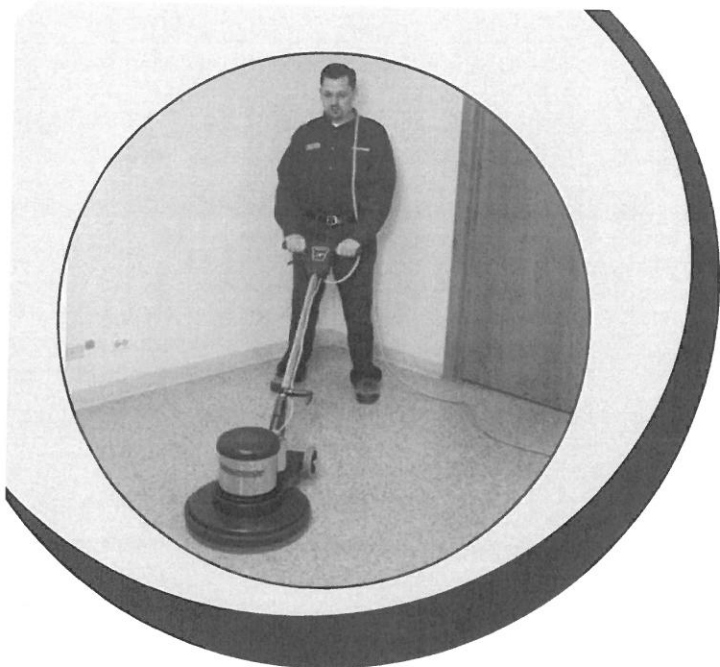

Key Features

- Infinitely adjustable ergonomic handle
- Heavy duty frame construction
- Multiple sizes and speeds to fit all cleaning applications
- Heavy duty planetary gears for smooth operation
- Built to operate in commercial and industrial applications
- 17" and 20" machines come with pad driver at no additional cost, 13" does not come with the pad driver

Safety

- Heavy duty 14-3 jacketed power cable designed for long wear
- Hospital grade plugs that meet all health care compliance regulations
- Safety interlock switches prevents accidental machine operation
- Heavy duty non-conductive strain relief protects operator and power cable
- Wrap-around bumper protects all environmental surroundings
- Carbon brush indicator light on two speed machines
- Power indicator light lets the operator know when the machine has power
- All operator control handles are non-conductive to protect the operator

Markets

- Hospitality
- Institutional
- Industrial
- Health Care

Accessories/Options

- Multiple brush grits to meet all cleaning needs
- Pad drivers
- Solution tanks

General Overview

- Powder coated epoxy paint helps eliminate scratching and corrosion
- Large 4.5" non-marking transport wheels
- All 17" and 20" floor machines come standard with 1.5 hp, triple planetary gears
- 20" machines are available in dual speed
- 13" ¾ hp machines are available for "tight" cleaning situations
- All handles are made of tubular coated steel to resist rust and corrosion
- All machines are equipped with a 50' 14-3 wire heavy duty water resistant power cord

Productivity

- Many types of brushes, pads and scrubbing heads are available to use on the Front Runner Floor Machines
- Heavy duty capacitor start provides the needed power even in the toughest cleaning situations
- Available in three sizes to meet all your cleaning needs
- Whether its carpets, wood floors, concrete or stone, the Front Runner series machine will help get the job done

Ease of Use

- Infinitely adjustable handle from operator position
- Quick release cord latch
- Large non-marking 4.5" rear wheels for easy transport
- Simple safety release power switch
- Pad holder with center cup keeps pad evenly mounted

| Specifications | | | | |
|----------------------|----------------|---------------|---------------|---------------|
| Model Number | M13075-00 | FR17115 | FR20115-2S | FR20115 |
| Model Numb. -240V | N/A | FR17220 | FR20220-2S | FR20220 |
| Brush Diameter | 13" (43 cm) | 17"/43 cm | 20"/51 cm | 20"/51 cm |
| Horsepower | 3/4 hp | 1-1/2 hp | 1-1/2 hp | 1-1/2 hp |
| Brush Speed | 175 rpm | 175 rpm | 160-330 rpm | 175 rpm |
| Cable Length | 50' (15 m) | 50'/15 m | 50'/15 m | 50'/15 m |
| Cable Size | 14-3 | 14-3 | 14-3 | 14-3 |
| Wheels | 3-1/2"/9 cm | 4-1/2"/11 cm | 4-1/2"/11 cm | 4-1/2"/11 cm |
| Weight (with brush): | 60 lbs (27 kg) | 100 lbs/45 kg | 103 lbs/47 kg | 103 lbs/47 kg |

Specifications subject to change without notice.

Minuteman International Inc
 14N845 U.S. Route 20
 Pingree Grove, IL 60140
 Phone: (847) 264-5400
 Fax: (847) 683-5207

Minuteman is a full line manufacturer of maintenance products including critical filter vacuums, industrial and commercial vacuums, sweepers, scrubbers, floor and carpet machines, PowerBoss® sweepers and scrubbers, and Parker® Litter Vacs for industrial, commercial, and institutional facilities.

A Member of the Hako Group

Come Visit our Website at
www.minutemanintl.com



20 cu. ft. Upright Freezer with Temperature Alarm



20 cu. ft. Upright Freezer with Temperature Alarm

Put a spotlight on your frozen favorites inside this 20 cu. ft. upright freezer with LED interior lighting. Activating Fast Freeze quickly drops the temperature to help lock in freshness and flavor, and the temperature alarm will notify you if the freezer gets too warm. The upright freezer prevents frost build-up for a hassle-free defrosting experience, and you can choose the ideal temperature for whatever frozen foods you're storing with electronic temperature controls. Plus, you can be sure there is plenty of ice on hand with the optional icemaker.

Configuration and Overview

- Freezer Type
- Upright
- Energy Star® Qualified
- CEE Tier Rating

Freezer Features

- Door Ajar Alarm
- Fast Freeze Setting
- Power On Indicator Light
- Defrost Drain
- Door Lock
- Defrost Type
- Automatic Defrost
- Temperature Monitor Alarm
- 33 ¼" Wide X 72" High x 27 ½" Depth
- Power: Electric CSA Rating Household

Danby Designer



Beverage Center

DBC434A1BSSDD | 124.00 Beverage cans

Dimensions

Product Width 49.3cm 19.4"

Product Depth 63.3cm 24.92"

Product Height 84.1cm 33.11"

Weight

Shipping Weight 42kg 92.6lbs

Capacity

By Quantity 4.34 cu. ft. 124.00 Beverage cans

Project

Quantity

Item #

Model Specified:

CSI Section 11400

G-Series Reach-In Freezers/ Self-Contained




Equipped with an easy to use microprocessor control!



Model G31310



Model G22010



Model G12010

One, Two & Three Section Models, 32" Deep



Aside from their anodized aluminum side and interior finishes, Traulsen's G-Series "Dealer's Choice" models meet or exceed the standard specifications and performance of most other brands top tier product offerings. Reliable, energy efficient, and durable, with large individual storage capacities, the high quality G-Series line-up includes a wide range of one, two and three section reach-in refrigerator and freezer models, built in our most popular footprints. They are available with either full or half height doors, and the added convenience of a variety of different door hingings to choose from. In addition, each also includes a number of user-friendly features, making them one of the best overall equipment values in Foodservice today, and the right fit for nearly any commercial application.

AVAILABLE MODELS

| Single Section | | | Two Section | | | Three Section | | |
|----------------|------|---------|-------------|------|-------------|---------------|------|-------------------|
| Model # | Door | Hinging | Model # | Door | Hinging | Model # | Door | Hinging |
| G12000 | Half | Right | G22000 | Half | Left-Right | G31300 | Half | Left-Right-Right |
| G12001 | Half | Left | G22001 | Half | Right-Left | G31301 | Half | Left-Left-Right |
| G12010 | Full | Right | G22002 | Half | Right-Right | G31302 | Half | Right-Right-Right |
| G12011 | Full | Left | G22003 | Half | Left-Left | G31303 | Half | Left-Left-Left |
| | | | G22010 | Full | Left-Right | G31310 | Full | Left-Right-Right |
| | | | G22011 | Full | Right-Left | G31311 | Full | Left-Left-Right |
| | | | G22012 | Full | Right-Right | G31312 | Full | Right-Right-Right |
| | | | G22013 | Full | Left-Left | G31313 | Full | Left-Left-Left |

Standard Product Features

- High Quality Stainless Steel Exterior Front and Door(s)
- Corrosion Resistant Anodized Aluminum One-Piece Sides
- Durable Anodized Aluminum Interior
- Microprocessor Control With LED Temperature Readout
- Top-Mounted, Balanced, Self-Contained Refrigeration System
- Minus 10 Degree F Capable
- Large High Humidity Evaporator Coil Outside The Food Zone
- Load-Sure Guard Protects Against Improper Loading
- Full or Half Length Stainless Steel Doors With Locks
- Self-Closing Doors With Stay Open Feature At 120 Degrees
- Guaranteed For Life Cam-Lift Hinges
- Guaranteed For Life Horizontal Work Flow Door Handle(s)
- Automatically Activated Incandescent Lights
- Damage Resistant Stainless Steel Breaker Caps
- Three (3) Adjustable Epoxy Coated Shelves Per Section, Supported On Shelf Pins (installed at the factory)
- Energy Saving Automatic Non-Electric Condensate Evaporator
- Magnetic Snap-In EZ-Clean Door Gaskets
- Gasket-Protecting Anodized Aluminum Door Liner
- Anti-Condensate Door Perimeter Heaters
- Thermostatic Expansion Valve Metering Device Provides Quick Refrigeration Recovery Times
- Stainless Steel One-Piece Louver Assembly
- 9' Cord & Plug Attached
- Set of Four (4) 6" High Casters With Locks
- Three Year Parts And Labor Warranty
- Five Year Compressor Warranty

Optional Accessory Kits

- Additional Epoxy Coated Shelves*
- No. 1 Type Tray Slides* To Accommodate either: (1) 18" x 26" or (2) 14" x 18" Sheet Pans, Adjustable To 2" O.C.
- No. 4 Type Tray Slides* To Accommodate (1) 18" x 26" Sheet Pans (equips one full section)
- Universal Type Tray Slides* To Accommodate Either (1) 18" x 26" or (2) 14" x 18" Sheet Pans, or (2) 12" x 20" Steam Table Pans, Adjustable To 4" O.C.
- Plated Shelves* (for use in lieu of standard shelving)
- EZ-Change Interiors (#1, universals, universal heavy duty tray slides and shelves)
- 6" High Adjustable Legs (for use in lieu of standard casters)

*Please refer to spec sheet TR35872 for optional accessory kit details.

All optional accessory kits are shipped separately for later installation by others at the jobsite.



All models are **ENERGY STAR**® listed. Please refer to www.energystar.gov to view the most up-to-date product listing and performance data.



Listed by Underwriters Laboratories Inc., to U.S. and Canadian safety standards and Listed by NSF International.

3-YEAR
PARTS & LABOR WARRANTY

Approval: _____

Traulsen

TRAUlsen
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
Website: www.traulsen.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

| | | |
|------------------|----------|-------------------|
| Project | Quantity | Item # |
| Model Specified: | | CSI Section 11400 |

Specifications

Construction, Hardware and Insulation

Cabinet exterior front, louver assembly and doors are constructed of 20 gauge stainless steel. Cabinet sides (including returns), interior and door liners are constructed of anodized aluminum. The exterior cabinet top, back and bottom are constructed of heavy gauge aluminized steel. A set of four (4) 6" high casters are included.

Doors are equipped with a gasket protecting metal door pan, removable plug cylinder locks and guaranteed for life cam-lift, gravity action, self-closing metal, glide hinges with stay open feature at 120 degrees. Hinges include a concealed switch to automatically activate the interior incandescent lighting. Guaranteed for life, work flow door handles are mounted horizontally over recess in door which limits protrusion from door face into aiseways.

Gasket profile and Santoprene® material simplify cleaning and increase overall gasket life. Anti condensate heaters are located behind each door opening.

Both the cabinet and door(s) are insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

Refrigeration System

A top mounted, self-contained, balanced refrigeration system using R-404A refrigerant is conveniently located behind the one piece louver assembly. It features an easy to clean front facing condenser, thermostatic expansion valve, air-cooled, hermetic compressor, large, high humidity evaporator coil located outside the food zone and a top mounted non-electric condensate evaporator. A 9' cord and plug is provided. Standard operating temperature is 0 to -5°F (all models are -10 degree F capable in up to 90 degree ambient).

Controller

The easy to use water resistant microprocessor control system is supplied standard. It includes a 3-Digit LED Display, and a Fahrenheit or Celsius Temperature Scale Display Capability.

Interior

Standard interior arrangements include three (3) epoxy coated wire shelves per section, mounted on shelf pins, installed at the factory. Shelves are full-width, and do not have any large gaps between them requiring the use of "bridge" or "junior shelves." Recommended load limit per shelf should not exceed 225 lbs.

Warranties

Both a three year parts and labor warranty and a five year compressor warranty (self-contained models only) are provided standard.

| DIMENSIONAL DATA | 1-Section Models | 2-Section Models | 3-Section Models |
|---|---|---|---|
| Net capacity cu. ft. | 24.2 (686 cu l) | 46.0 (1303 cu l) | 69.1 (1958 cu l) |
| Length - overall in. | 29 ⁷ / ₈ (75.9 cm) | 52 ¹ / ₂ (132.4 cm) | 76 ⁵ / ₈ (193.8 cm) |
| Depth - overall in. | 35 (88.8 cm) | 35 (88.8 cm) | 35 (88.8 cm) |
| Depth - over body in. | 32 (81.3 cm) | 32 (81.3 cm) | 32 (81.3 cm) |
| Depth - door open 90° in. | 57 ⁷ / ₈ (146.3 cm) | 57 ⁷ / ₈ (146.3 cm) | 57 ⁷ / ₈ (146.3 cm) |
| Clear door width in. | 21 ¹ / ₈ (53.6 cm) | 21 ¹ / ₈ (53.6 cm) | 21 ¹ / ₈ (53.6 cm) |
| Clear half-door height in. | 27 ¹ / ₂ (69.9 cm) | 27 ¹ / ₂ (69.9 cm) | 27 ¹ / ₂ (69.9 cm) |
| Clear full-door height in. | 57 ⁷ / ₈ (146.3 cm) | 57 ⁷ / ₈ (146.3 cm) | 57 ⁷ / ₈ (146.3 cm) |
| Height-overall on 6" casters ³ | 83 ³ / ₄ (211.5 cm) | 83 ³ / ₄ (211.5 cm) | 83 ³ / ₄ (211.5 cm) |
| No. Standard Shelves | 3 | 6 | 9 |
| Shelf area sq. ft. ¹ | 18.8 (1.75 sq m) | 34.6 (3.21 sq m) | 51.9 (4.82 sq m) |
| ELECTRICAL DATA | | | |
| Voltage | 115/60/1 | 115/60/1 | 208-230/115/60/1 |
| Feed wires with Ground | 3 | 3 | 4 |
| Full load amperes | 9.5 | 11.2 | 11.0 |
| REFRIGERATION DATA | | | |
| Refrigerant | R-404A | R-404A | R-404A |
| BTU/HR H.P. ² | 1930 (¼ HP) | 2970 (¾ HP) | 4710 (1 HP) |
| SHIPPING DATA | | | |
| Length - crated in. | 35 (89 cm) | 63 (160 cm) | 91 (231 cm) |
| Depth - crated in. | 43 (109 cm) | 43 (109 cm) | 43 (109 cm) |
| Height - crated in. | 83 ¹ / ₂ (212 cm) | 83 ¹ / ₂ (212 cm) | 83 ¹ / ₂ (212 cm) |
| Volume - crated cu. ft. | 71 (2011 cu l) | 131 (3711 cu l) | 189 (5354 cu l) |
| Net Wt. lbs. | 320 (145 kg) | 650 (295 kg) | 690 (313 kg) |
| Gross Wt. lbs. | 410 (186 kg) | 700 (318 kg) | 870 (395 kg) |


NOTES


NOTE: Figures in parentheses reflect metric equivalents.

1= Figure shown reflects the area of standard shelf compliment plus the additional storage area available on the cabinet bottom.

2= Based on a 90 degree F ambient and -10 degree F evaporator. For remote data please refer to spec sheet TR35837.

3= 12" Top clearance preferred for optimum performance and service access.






 1 and 2 Section Models equipped with one NEMA 5-15P Plug

 3-Section Models equipped with one NEMA L14-20P Plug

NOTE: When ordering please specify: Voltage, Hinging, Door Size, Options and any additional warranties.

Continued product development may necessitate specification changes without notice.

Part No. TR35788 (revised 7/13)

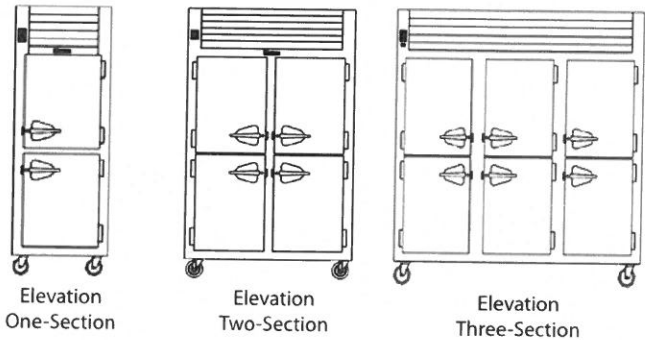

FRIGIDAIRE FEF3048LS ELECTRIC RANGE



Electrical Specifications: 240V / 208V 60Hz

Exterior Dimensions:

Height: 47 – 3/4"

Width: 29 - 7/8"

Depth: 25 – 3/4"